NUMERHYD

MULTI-STATION MANIFOLD CETOP 5


S5L


A24


SIDE EXIT


- Sorties latérales
- Seitlich

- Service pressure 420 bar for steel - 250bar for Aluminium alloy.
- Possibility to connect with a special manifold.
- Possibility to connect with several block S3 or S5.

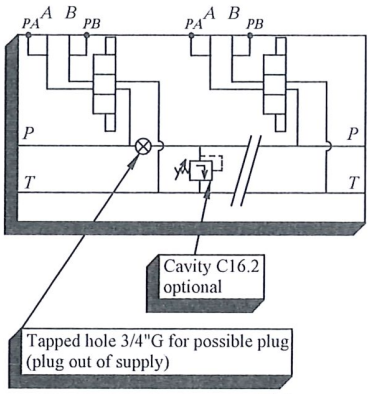


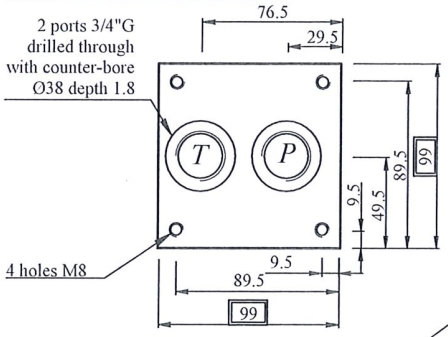


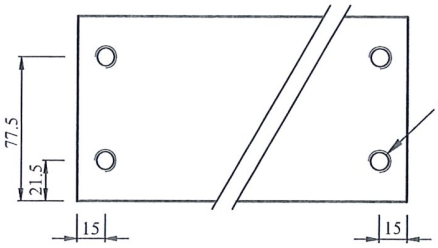

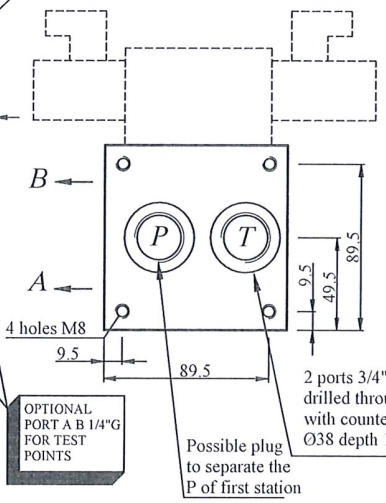

OPTIONAL PORT A B 1/4"G FOR TEST POINTS

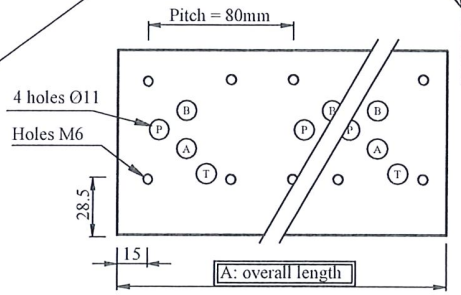


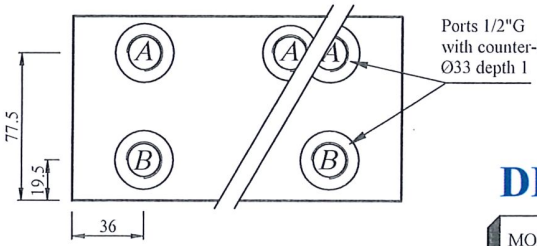

* OPTIONAL CAVITY FOR VALVE C16.2
COMPONENT FOR EXAMPLE :
(OUT OF SUPPLY)

* HYDRAFORCE VC16.2	RV16-26
* EATON C16.2	RV5-16
* PARKER C16.2	RAH16-1
* HYDAC FC16.2	DB16P
ETC...	

* AND ALSO :
DIRECTIONAL VALVE
RESTRICTOR
CHECK VALVE



DIMENSIONS

MODEL	A	weight (kg) STEEL	ALU
S5L1G-	75	5	1.8
S5L1GP-	105	7	2.4
S5L2G-	155	10	3.5
S5L3G-	235	15	5.4
S5L4G-	315	20	7.1
S5L5G-	395	25	9.1
S5L6G-	475	30	11

MODEL CODE

S	5	L	?	G	?	?	?

- S: STANDARD MANIFOLD
- 5: SIZE CETOP 5
- L: SIDE EXIT
- ?: NUMBER OF STATIONS 1,2,3,4,5,6
- G: TYPE OF PORT B.S.P.P.
- ?: -: NO CAVITY P: CAVITY C16.2
- ?: - : NO PORT 1/4 BSP M: PORTS 1/4 G ON A&B
- ?: MATERIALS S : STEEL A: ALU. 2017A